

DLR1508P/DLR1509P

Legendary waist banding machine

4 needle, flat bed, double chain stitch machine with puller for waist banding.

This machine is equipped with horizontal looper movement mechanism.




Feature


Comparison between 1508P with 1509P

5 kinds of gauge size are available for 1509 without the conversion of gauge parts.

DLR1508P
(1/4" - 1-1/4")




DLR1509P



■ Puller

Metal upper puller and rubber lower puller can feed fabrics smoothly.

Split presser foot can cross joining parts easily.

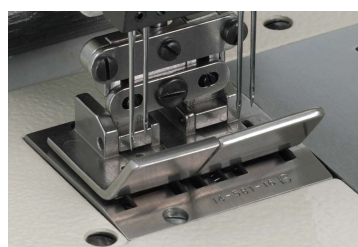

■ Presser foot

Specifications	DLR1508P/DLR1509P
Max. Speed	4500 rpm
Needle Type	Organ TVx5 #21
Stitch Length	7~16 inch
Presser Foot Lift	10 mm
Needle Bar Stroke	34 mm
Diff. Feed Ratio	N/A
Gauge Size	DLR1508P : 1/4-1-1/4, 3/16-1-3/16, (1/4-3/4-1/4) DLR1509P : 1/8-1/8-1-1/8-1/8
Application	Waist banding
Material	Medium to Heavy



DLR1508P/DLR1509P

腰帯付け用

二重環縫いミシン

4本針、フラットベッドの腰帯付け用二重環縫いミシンです。

ルーパー横ぶり機構の採用により、中厚から厚物の縫製に適しています。

ラップシーム、ゴム付け等にも応用できます。




製品の特徴



1508Pと1509Pの比較

DLR1509Pはゲージ交換も必要なく、5種類のゲージサイズが利用できます。
また、1/8のゲージ幅により、様々な縫製サイズに対応可能です。

DLR1508P
(1/4" - 1-1/4")



DLR1509P



■ プーラー

■ 押さえ

鉄製の上プーラーとゴム製の下プーラーが、生地をスムーズに送り出します。
分割押さえにより、縫い合わせ部分を容易に越えることができます。

仕様	DLR1508P/DLR1509P
回転速度	4500 rpm
使用針	Organ TVx5 #21
縫い目長さ	7~16 inch
押さえ上げ量	10 mm
針棒ストローク	34 mm
差動送り機構	N/A
ゲージ幅 (inch)	DLR1508P : 1/4-1-1/4, 3/16-1-3/16, (1/4-3/4-1/4) DLR1509P : 1/8-1/8-1-1/8-1/8
用途	腰帯付け
生地の厚さ	中厚~厚物

