


NR9803GALK-UTA

Top and bottom cover stitch machine with fabric trimmer

3 needle, 5 thread, cylinder bed, top and bottom cover stitch machine with fabric trimmer and pneumatic thread trimmer.

It is a model suitable for sewing hems and sleeves of T-shirts.

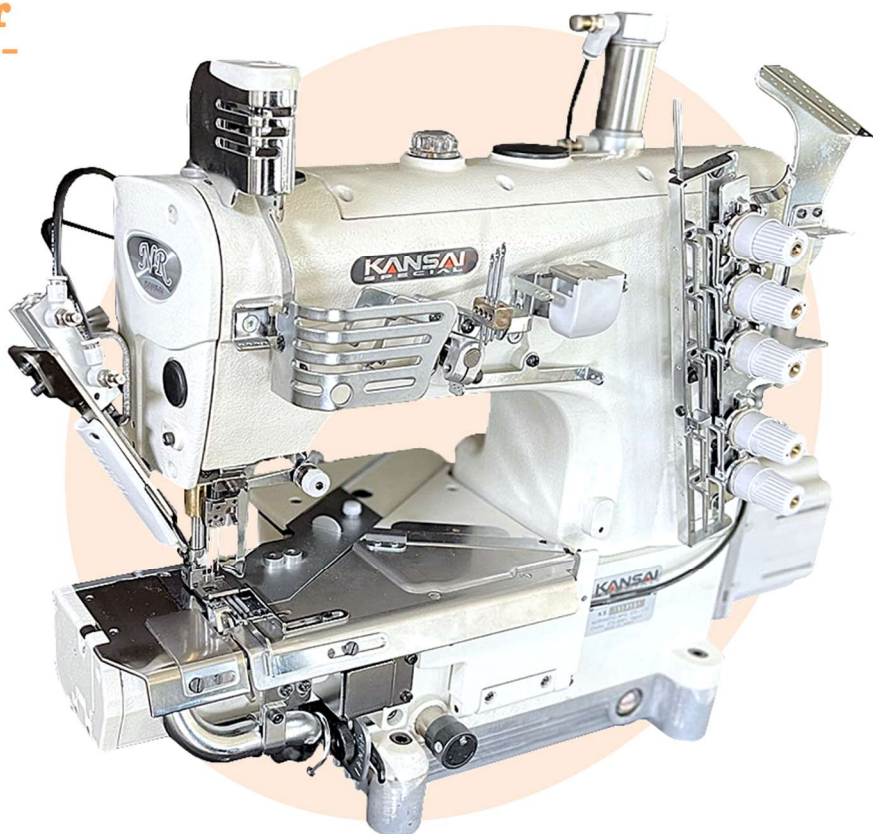

Features




■ Fabric trimmer

Fabric trimmer made of super hard steel last long and ensures secure cut.



■ Thread trimmer


It is equipped with a thread trimming device as standard.

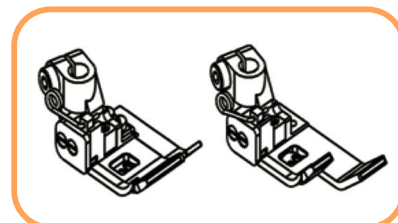

■ Presser foot

Two types of presser feet are included in the purchase for sewing different garments.

Direct motor



The direct motor provides excellent energy savings and responsiveness, as well as improved start-up and stopping accuracy of the sewing machine.

Specifications	NR9803GALKI-UTA
Max. Speed	5500 rpm
Needle Type	Organ UYx128GAS #11
Stitch Length	6~16 inch
Presser Foot Lift	6 mm
Needle Bar Stroke	33 mm
Diff. Feed Ratio	Front-to-back movement (ratio 0.3~2.9)
Gauge Size	7/32 , 1/4 inch
Application	Top & bottom covering
Material	Light to Medium



NR9803GALK-UTA


糸切り装置・

生地端カッター付き

偏平縫いミシン

3本針、5本糸のシリンダーベッド、糸切り装置、左メス付き偏平縫いミシンです。

このモデルはTシャツの裾縫いや袖縫いに適しています。

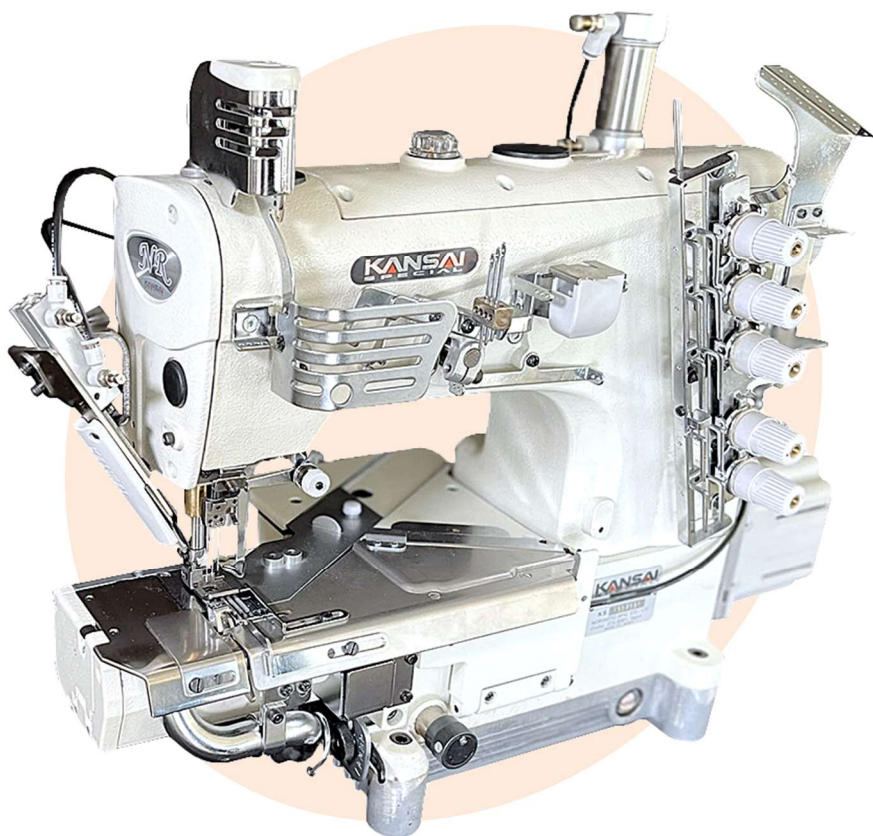


製品の特徴




■ 生地端カッター

縫製時に生地端をトリミングしながら美しい縫い上がりを実現します。

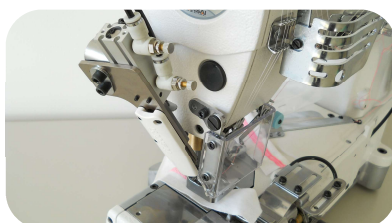

■ 糸切り装置


標準で糸切り装置を搭載しており、縫製後の手間を省くことができます。

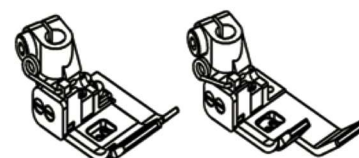

■ 選べる押さえ

生地の厚みに合わせ押さえを選ぶことができます。
(左が標準仕様)

ダイレクト モーター



ダイレクトモーターにより、省エネや応答性に優れ、ミシンの立ち上がりや停止精度等の向上が実現しました。
これにより、作業性やメンテナンス性も向上します。

仕様	NR9803GALK-UTA
回転速度	5500 rpm
使用針	Organ UYx128GAS #11
縫い目長さ	6~16 inch
押さえ上げ量	6 mm
針棒ストローク	33 mm
差動送り機構	前後差動 (差動比 0.3~2.9)
ゲージ幅	7/32, 1/4
用途	両面飾り縫い
生地の厚さ	薄物~中厚物

