
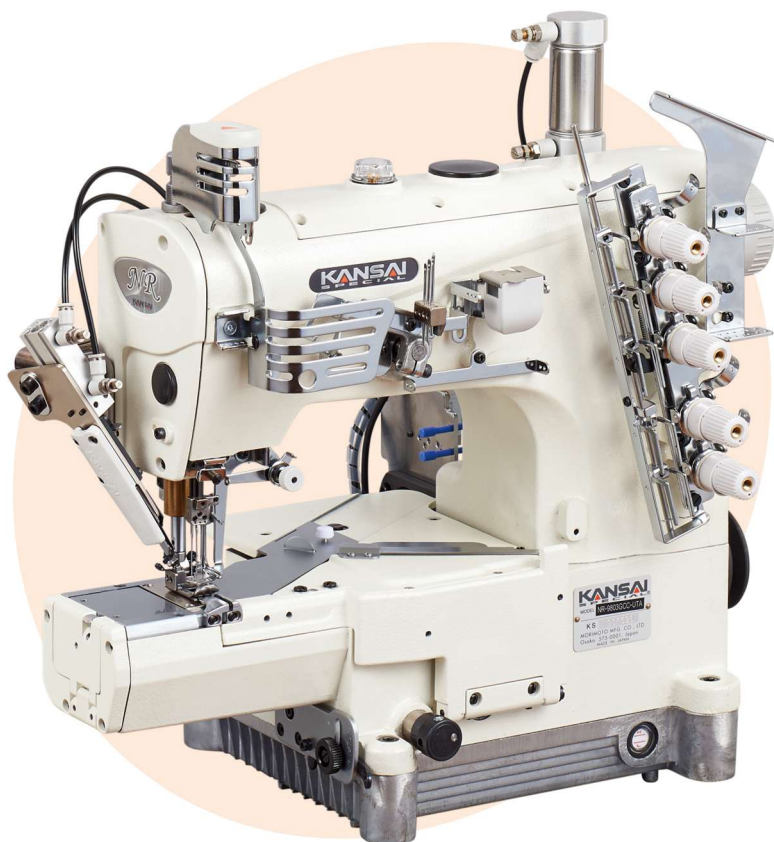


NR9803GCC-UTA

Top and bottom cover stitch machine with thread trimmer


3 needle, cylinder bed, top and bottom cover stitch machine with pneumatic thread trimmer.

It is a model suitable for covering and plain seaming.

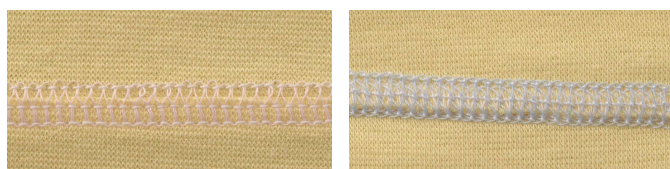


Features


Select from three versatile applications



CL type (Left fold covering)



C type (Center covering)



A type (Hemming guide)



■ Thread trimmer

It is equipped with a thread trimming device as standard.



■ Air type foot lifter

Adjusts presser pressure to suit the fabric, enhancing sewing quality.

Specifications	NR9803GCC-UTA
Max. Speed	6000 rpm
Needle Type	Organ UYx128GAS #11
Stitch Length	6~16 inch
Presser Foot Lift	6 mm
Needle Bar Stroke	31 mm
Diff. Feed Ratio	Front-to-back movement (ratio 0.3~2.9)
Gauge Size	7/32 , 1/4 inch
Application	Top & bottom covering
Material	Light to Medium





NR9803GCC-UTA

糸切り装置付き 偏平縫いマシン




3本針、5本糸のシリンダーベッド、
糸切り装置付き偏平縫いマシンで
す。

このモデルはTシャツの裾縫いや
袖縫いに適しています。

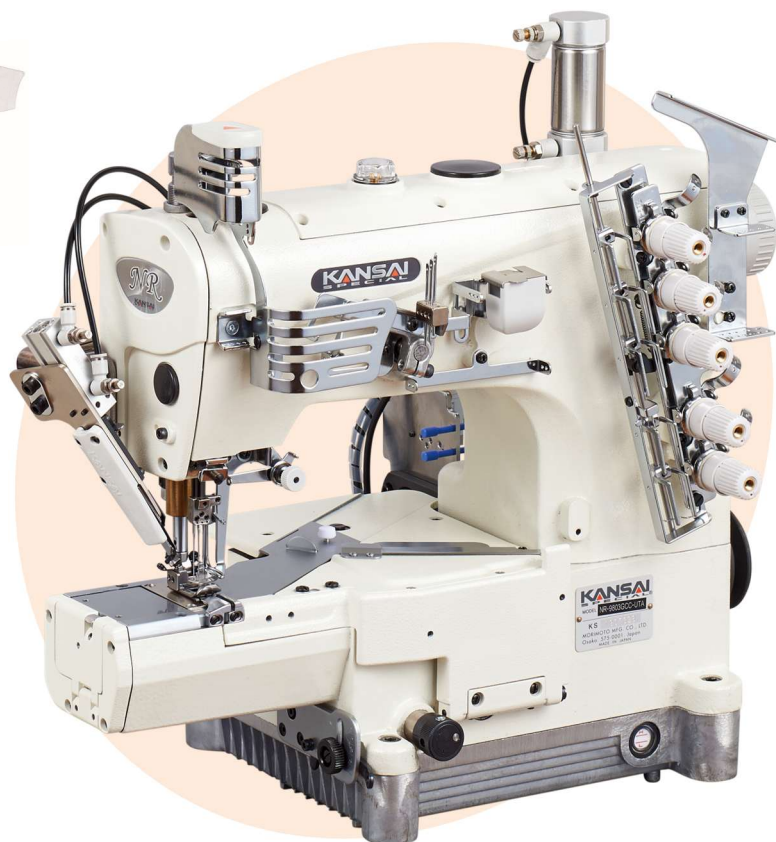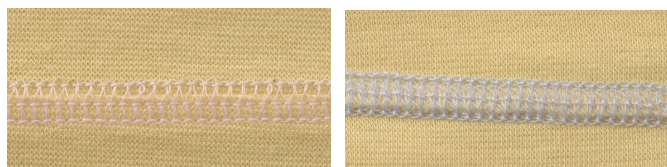


製品の特徴


選べる3つの用途



CL タイプ
(左倒し用)



C タイプ
(センターカバーリング)



A タイプ
(ヘム縫い用ガイド)



■ 糸切り装置

縫製後の面倒な糸切りの差
作業が減り、生産効率が
良くなります。



■ 減圧押さえ

素材に合わせて押さえ圧を
調整し、縫製品質を向上し
ます。

仕様	NR9803GCC-UTA
回転速度	6000 rpm
使用針	Organ UYx128GAS #11
縫い目長さ	6~16 inch
押さえ上げ量	6 mm
針棒ストローク	31 mm
差動送り機構	前後差動 (差動比 0.3~2.9)
ゲージ幅	7/32, 1/4
用途	両面飾り縫い
生地の厚さ	薄物~中厚物

