

FBX1104PA-30WAC


Automatic waist banding machine

4 needle, cylinder bed, double chain stitch machine with needle feed mechanism for waist banding.

The needle feed amounts can be adjusted with the lower feed dog at the same time by push button.


FBX series has a wide range of applications as it can sew material up to a width of 70mm, especially tubular goods such as waistbands, elastic attaching, and more.

Features

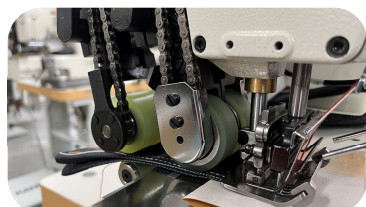

■ Double puller

It makes possible to cut materials properly by holding fabric with the front and rear puller.

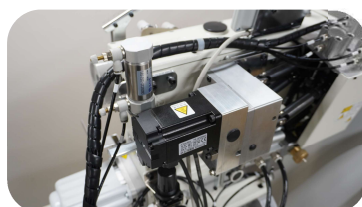

★ Puller drive

The servo motor is used to drive the puller. This ensures stable feeding.





■ Touch screen

In addition to turning the automatic mode on and off, you can easily adjust belt cutting distance and other things.



■ Auto skip stitch

The sensor detects the edge of fabric, then the machine automatically skip stitch and cut the fabric.

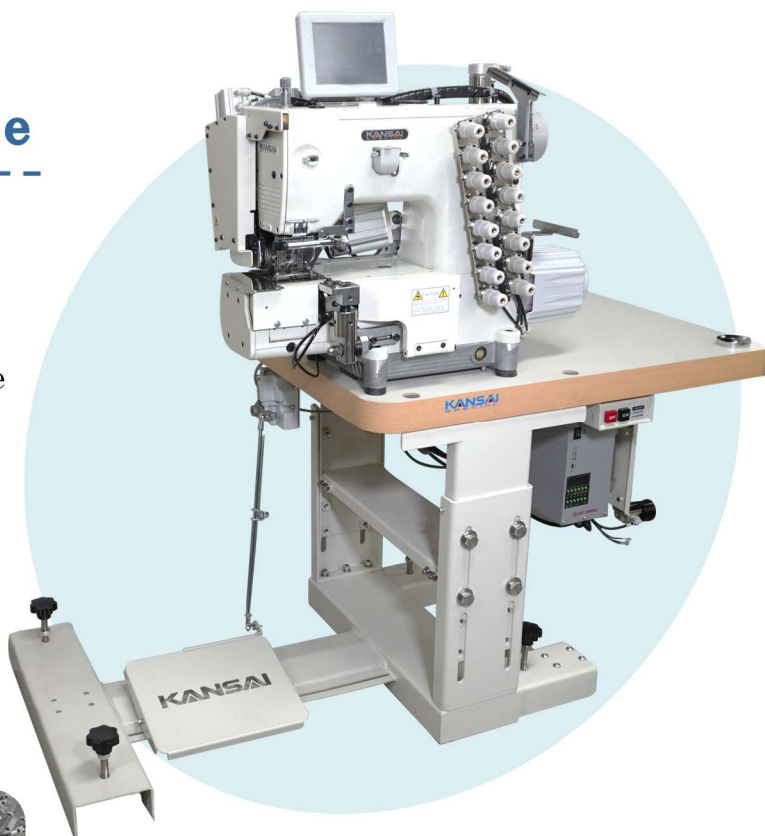

Specifications	FBX1104PA-30WAC
Max. Speed	3000 rpm
Needle Type	Organ DVx57 #21
Stitch Length	4~12 stitch/inch
Presser Foot Lift	9 mm
Needle Bar Stroke	32 mm
Diff. Feed Ratio	-
Gauge Size (inch)	1/4-1-1/4, 1/4-7/8-1/4, 1/4-11/8-1/4
Application	Waist banding
Material	Heavy



FBX1104PA-30WAC


全自動 腰帯付け用

二重環縫いミシン


4本針、8本糸のシリンダーベッド、腰帯付け用二重環縫いミシンです。

針送りと送り歯がリンクしているため、ボタン操作のみで両方の送り量を同時に調整できます。


縦振りルーパー機構により糸も通しやすく、またシリンダーベッドですので、腰帯付け以外の丸物、ゴム入れなど最大70mm までの幅広い用途に使用できます。

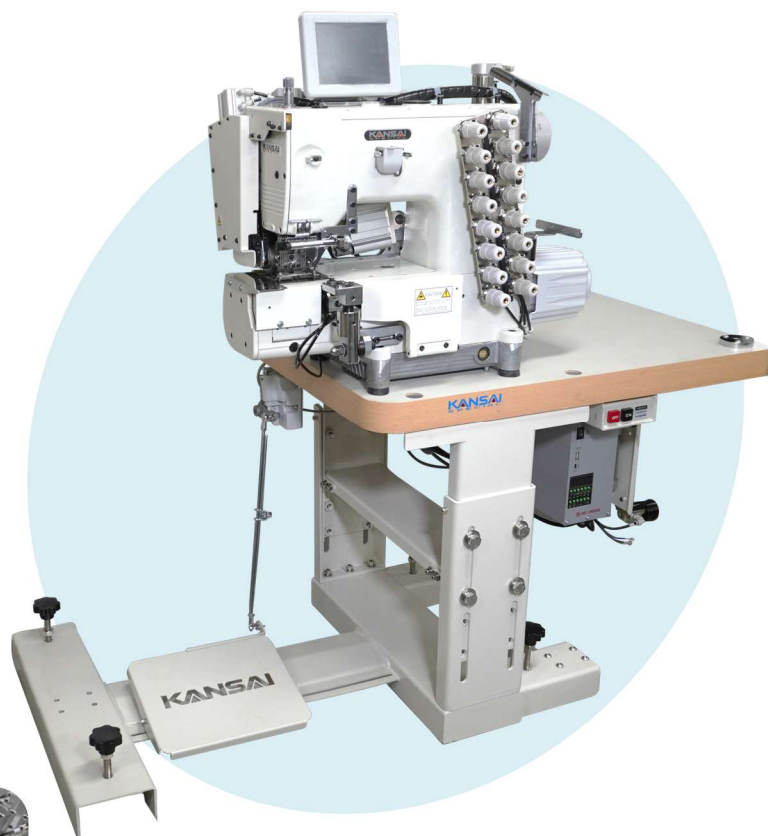


製品の特徴

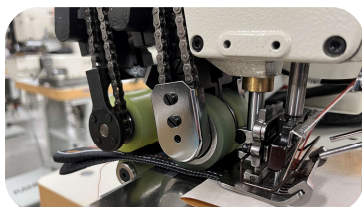

■ **ダブルプラー**
前後プラーで確実に生地を送り、腰帯カット時の安定感をアップします。

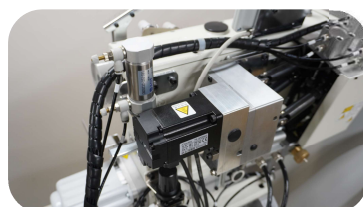

★ **サーボモーター**
プラーの稼働にサーボモーターを使用し、安定した送りを実現します。



■ **タッチパネル**
自動モードのON/OFFに加え、目飛ばし、腰帯カットの距離などの調整を簡単に行えます。



■ **目飛ばし機構**
センサーが生地端を自動で感知し、自動的に目飛ばしや生地カットをします。

仕様	FBX1104PA-30WAC
回転速度	3000 rpm
使用針	Organ DVx57 #21
縫い目長さ	4~12 Stitch/inch
押さえ上げ量	9 mm
針棒ストローク	32 mm
差動送り機構	-
ゲージ幅 (インチ)	1/4-1-1/4, 1/4-7/8-1/4, 1/4-11/8-1/4
用途	腰帯付け
生地の厚さ	厚物

