



Feed off the arm, Flat seamer for tape attaching

# NFS6604GFSL-DD

4 needles, 6 threads feed-off-the-arm, flat-seamer. Trimming left side edge with tape attaching for men's brief. Special presser foot and tape stand, economic direct servo motor, digital hand pulley.




## Tape attaching



Included tape stand, special holder and pleasure foot.

Folder: Tape width 18mm  
Finished width 9mm  
※Without top cover stitch

## Features

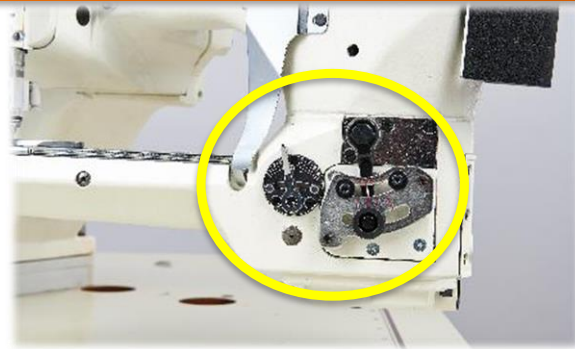

Stitch length & differential ratio can be adjusted by levers from out side of the machine.



Differential feeding movement can be changed from 1 : 1.5 to 1 : 0.5 with switching the position of feed rocker.



Operator friendly cushion pad

| Model Name     | Application               | Material             | Needle             | No. of threads | Needle gauge | Needle bar stroke | Stitch length     | Diff.Feed ratio | Presser foot lift | Operating speed |
|----------------|---------------------------|----------------------|--------------------|----------------|--------------|-------------------|-------------------|-----------------|-------------------|-----------------|
|                |                           |                      |                    |                |              |                   |                   |                 |                   |                 |
| NFS6604GFSL-DD | Under wear tape attaching | Light to Medium knit | FLX118GCS 10 FLG 8 | 6              | 6.0mm 5.2mm  | 30                | 10~16 stitch/inch | 1:0.5~1:1.5     | 6                 | 3500~3800 rpm   |

